

DS-D5032SC 32" LCD Monitor


key Features

- Support 8bit/10bit 2-ch LVDS(1366×768) HD display;
- Adopt 3-D digital comb filter;
- Support audio output;
- True color OSD and user-friendly operation menu;
- 1 channel HDMI 1.3 input interface, support HDCP 1.2;
- Adopt 3D noise reduction technology;
- Support high definition JPEG decoding;
- Programmable 12-bit RGB gamma correction technology;
- Support software spread-spectrum technology to reduce EMI radiation;
- Adopt Mstar ACE-5 auto color and image enhancement engine, improve image contrast, detail and edge;
- Support USB2.0 interface; support U disk, mobile hard disk, MP3, USB card reader, etc.

Model:

DS-D5032SC

Dimension:

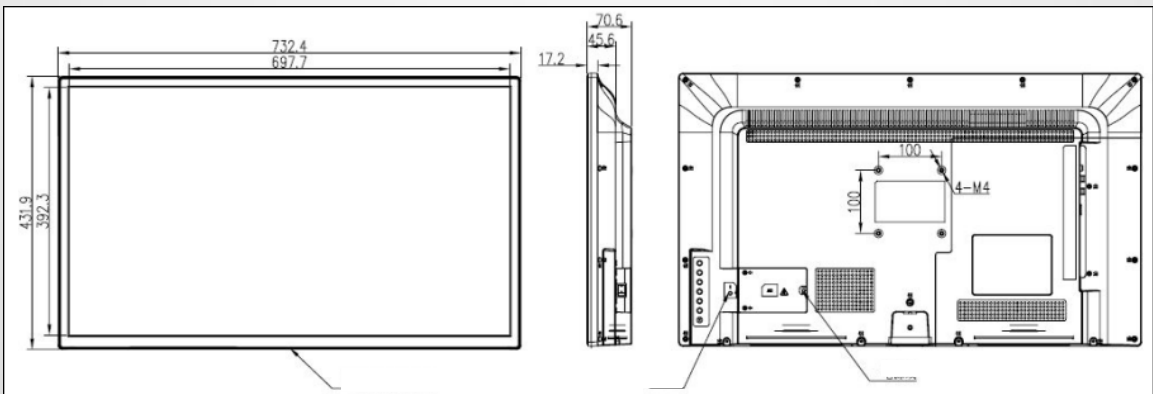

DS-D5032SC 32" LCD Monitor



| | | |
|------------------------------|--|---|
| Model | DS-D5032SC | |
| Display Type | TFT-LED Backlight | |
| Screen Size | 32" | |
| Dot Pitch (H×V) | 0.51075mm×0.51075mm (0.020"×0.020") | |
| Resolution | 1366×768 | |
| Brightness | 300cd/m ² | |
| Contrast | 1200:1 | |
| Response Time | 6ms | |
| Color | 16.7 M | |
| Viewable Area (H×V) | 697.685mm×392.25mm (27.65"×15.44") | |
| Viewing Angle | Horizontal 178°, Vertical 178° | |
| Interfaces | HDMI Input | 1 |
| | VGA Input | 1 |
| | BNC Input | 1 |
| | CVBS Input | 1 |
| | BNC Output | 1 |
| | PC AUDIO-IN | 1 |
| Power Supply | 100 ~ 240V AC, 50/60Hz | |
| Power Consumption | ≤ 75W | |
| Operation Temperature | 5°C ~ 40°C (41°F ~ 104°F) | |
| Operating Humidity | 10%~85% | |
| Storage Temperature | -20°C ~ 55°C (-4°F ~ 131°F) | |
| Storage Humidity | 5%~95% | |
| Dimension | 732.4mm×431.9mm×70.6mm (28.83"×17.00"×2.78") | |
| Weight | 12.12lb (5.5Kg) | |