



Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 1920×1080.
- Support TVI (4MP/5MP) Cameras :300M;
- Support AHD(4MP/5MP)Cameras:500M;
- Support CVI (2MP/4MP)Cameras:500M;
- High fidelity digital processing, brilliant and vivid video.
- 3D digital noise reduction technology;
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Natural color




Contrast enhancement



Detail enhancement



Wide Viewing Angles(Up to 178°)

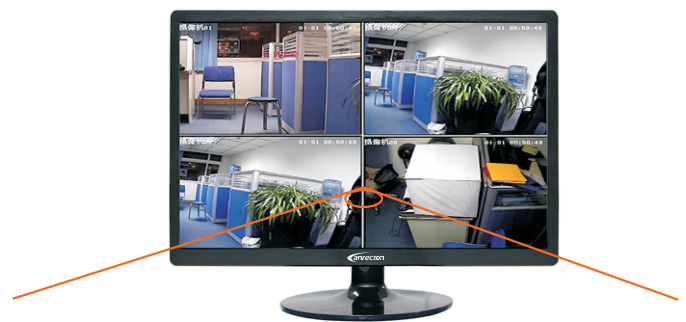


178° (H)/178° (V)

DISPLAY CHARACTERISTICS

Mode Name	LC-ME1001
Screen Size	10''
Active Display Area (mm)	211.2mm(W)×158.4mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1920 × 1080
Display Color	16.7M
Pixel Pitch(mm)	0.248(H)×0.248(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	1000:1
Viewing Angle	178(H) /178(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC output	1(Add BNC Extender) 
BNC input	1
TVI/CVI/AHD/CVBS	Support

VIDEO

Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way

Power	DC12V~24V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≦10W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---