



Product Feature

- 4K HD Solution
- Using all-imported industrial-grade LED screen, Designed for CCTV.
- High brightness, High contrast, High definition.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178 ° wide viewing angle; Ensure that the image display is not deformed.
- 7/24 working Status; Continue working 5 years.
- Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation.
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



1080p HD resolution

HD Quality

3840x2160



DISPLAY CHARACTERISTICS

Mode Name	LC-MS3201-4K
Screen Size	32''
Active Display Area (mm)	698mm(W)×392mm(H) Display Mode
	16:9
LED Type	TFT-LED
Resolution	3840 x 2160
Display Color	16.7M
Pixel Pitch(mm)	0.181875(H)×0.18175(V)
Brightness(nits)	300cd/m ²
Contrast Ratio	3000:1
Viewing Angle	178(H) /178(V)
Response Time	9.5ms
Backlight	LED

INPUT&OUTPUT

DVI	1 VGA
1	
DP	1
HDMI 2.0	1
Speaker	2x3W(Stereo)

VIDEO

Color	PAL/NTSC/SECAM
System OSD	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
Control	YES
3D comb filter	YES


POWER&Mount Way

Video Noise Reduction	
	AC100V~240V,50/60Hz
Power	-30 to +85 °C
Working Temperature	≤ 100W
Power Consumption	Chinese/English(other languages supported) Stand
Menu	mount, VESA mount
Mounting	50000Hours



ACCESSORIES

INCLUDED ACCESSORIES

Industrial PSU,Screw, Cable holder, Quick start guide

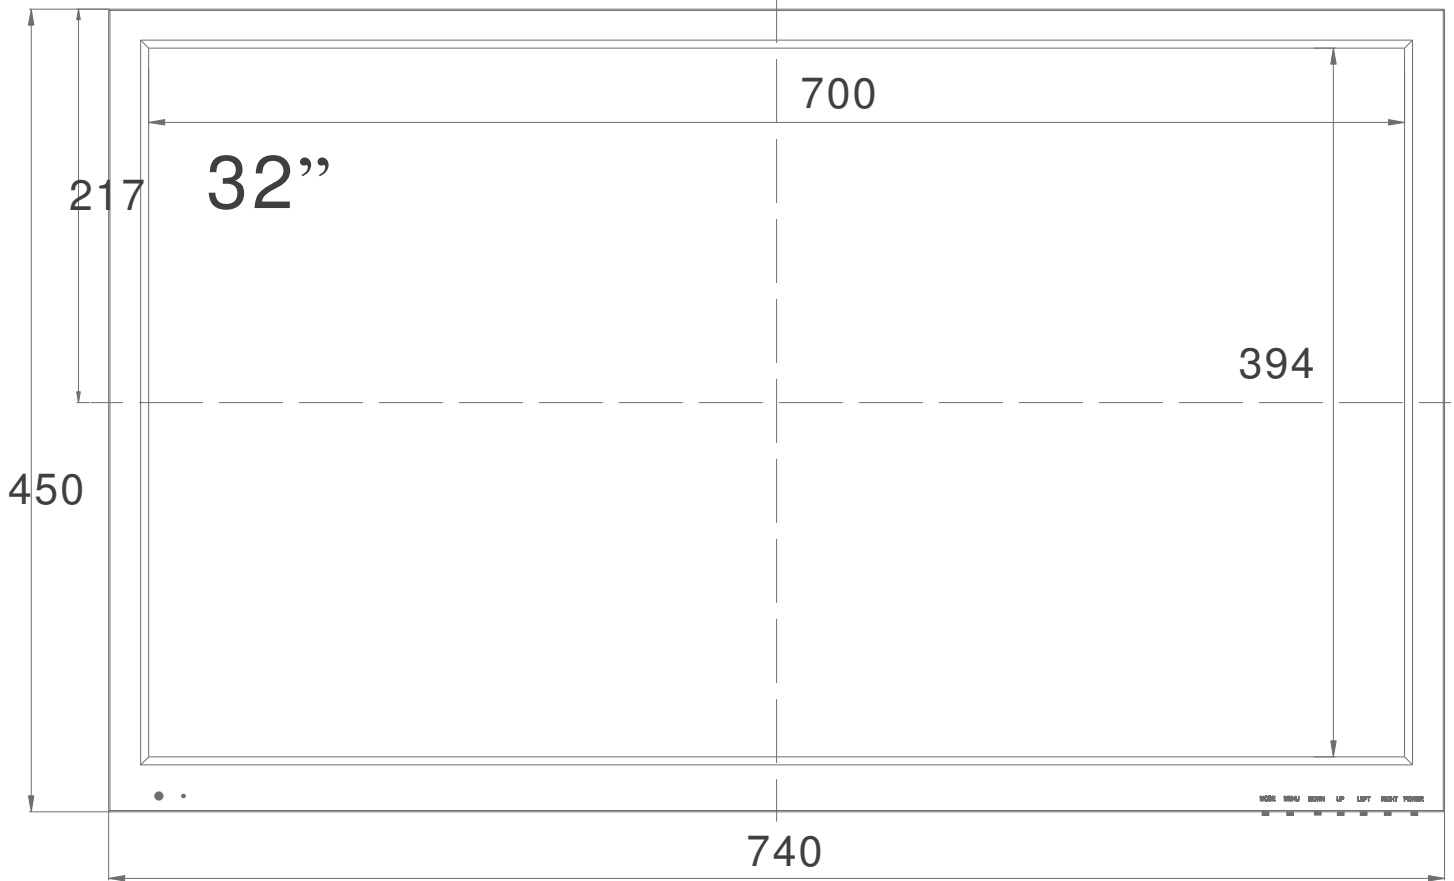

Unit:mm

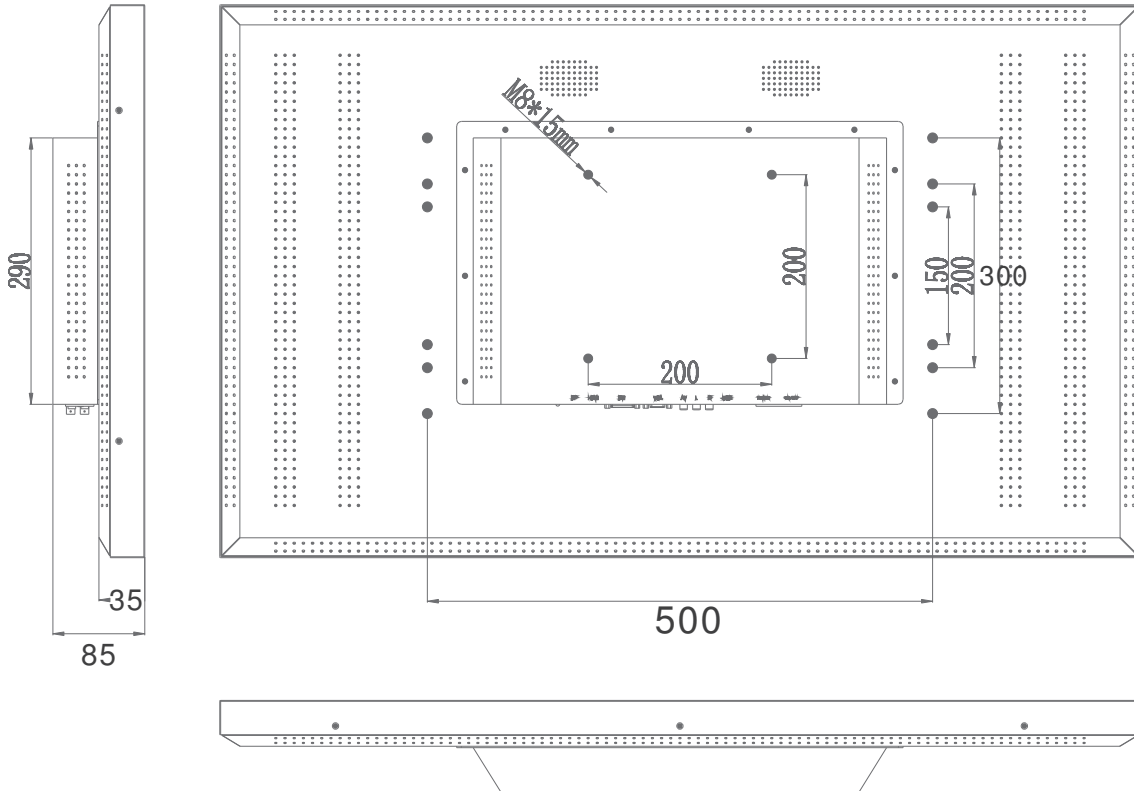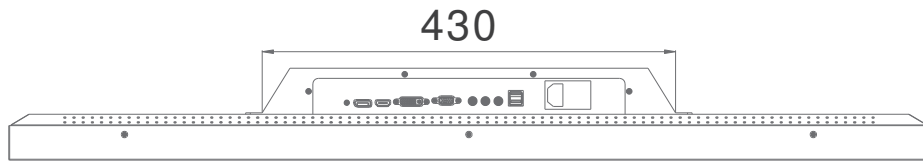

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION (). ALL RIGHTS RESERVED.