

NVR201EP Network Video Recorder



NVR201EP

Key Features


- 4/8-channel 1080P input
- Third-party IP cameras supported with ONVIF conformance
- HDMI and VGA output up to 1080P
- Accurate retrieval, instant playback
- 1 SATA HDD up to 6 TB
- 4/8 RJ45 POE+ Interface
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

Specifications



	NVR201-04EP	NVR201-08EP
Video		
IP Video Input		8-ch
VGA Output	1-ch	
HDMI Output	1-ch	
Recording Resolution	1080P/720P/ D1/2CIF/CIF	
Sync Playback	4-ch	8-ch
Audio		
Output	1-ch, RCA	
Two-way Talk	1-ch Input, 1-ch Output (Reuse the audio output channel), RCA	
Hard Disk Driver		
HDD	1 SATA interface	
Capacity	Up to 6TB capacity for each HDD	
External Interface		
Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet Interface,	
PoE Interface	4 RJ45 10M/100M PoE+ Interface (802.3at)	8 RJ45 10M/100M PoE+ Interface (802.3at)

USB Interface	1 USB2.0 interface, 1 USB3.0 interface	
Network		
Incoming bandwidth	32Mbps	64Mbps
Outgoing bandwidth	96Mbps	
Decoding		
Live view/ Playback	3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF	
Capability	18-ch@D1, 9-ch@720P, 4-ch@1080P	
General		
Power Supply	48 VDC, 1.8A	52 VDC, 1.8A
Consumption	≤ 8 W (without Disk)	
PoE	Max 30W for single port Max 64W in total (8W for each)	
Working Environment	-10°C to 55°C(10 °F to 131 °F) 10% to 90% RH	
Weight	Empty<1.5kg(3.3lb) Fully Configured<2.1kg(4.6 lb)	
Dimensions (W x D x H)	360.0 × 254.3 × 43.6 mm (14.17" × 10.01" × 1.72")	

Dimensions

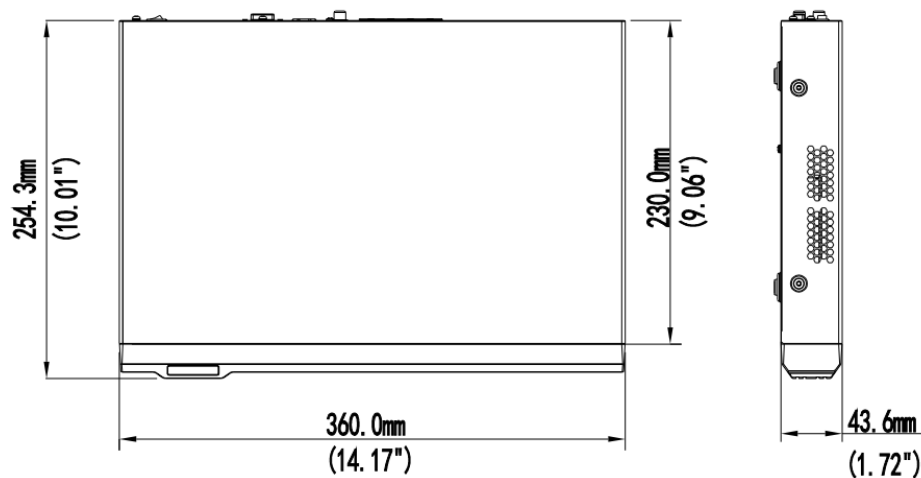

Rear Panel

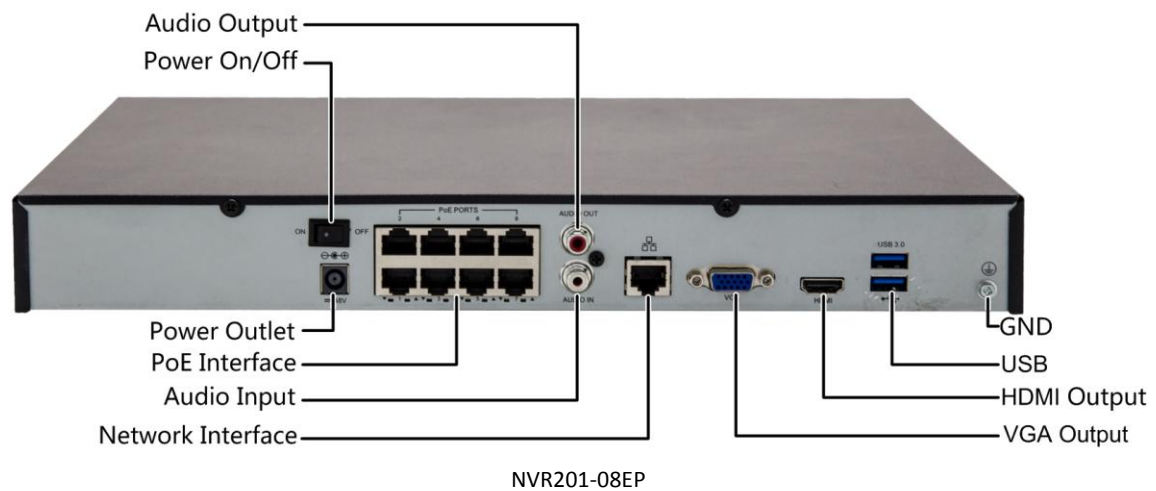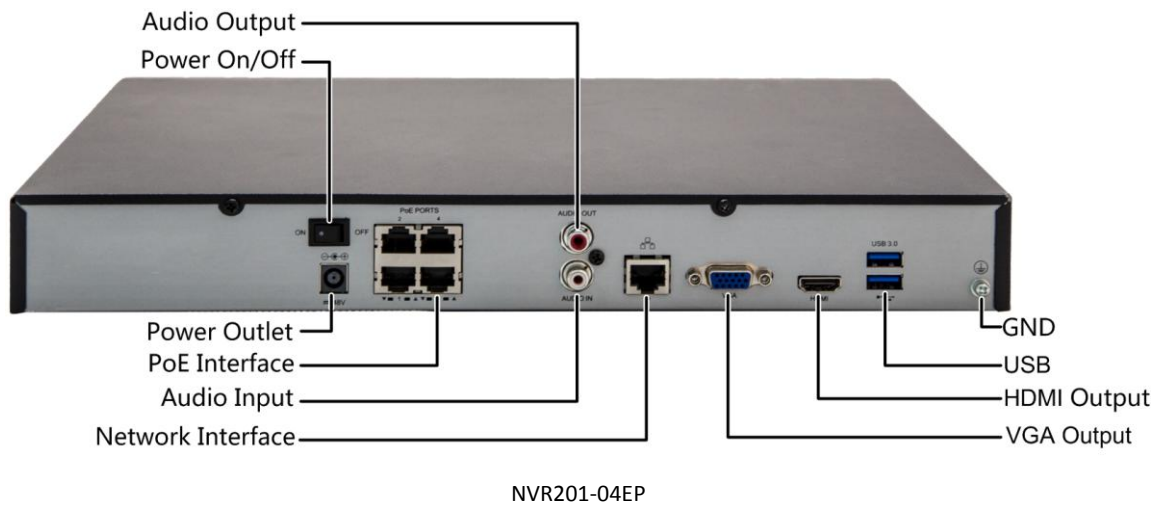

Zhejiang Uniview Technologies Co., Ltd.

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.