

## Hi-PoE injector for use with high power demanding products

- Hi-PoE 56v, 60 watts
- Suitable for Speed Dome Cameras




## Specifications

PSE	PWR-DC5611
INPUT	AC 100-240V~ 50/60Hz 2AMax
OUTPUT	DC 56V/1.1A (+2%,-4%)
Protection/Environmental	
Protection	Output over current protection: 1.2A Short circuit protection (Yes)
	Surge protection power input port meets EN 61000-4-5 criterion B: L-N 2KV L,N-PE 4KV Output communication port :1kV differential mode (criterion B)
Enviromental	
Storage Temperature	-40°C~70°C(-40°F~158°F)
Operating Temperature	-20°C~60°C(-4°F~140°F)
Working humidity	<95% RH
Physical Properties	
Weight	473g(1.04lb)
Dimension(LxWxH)	183mmx70.8mmx37mm(7.20"x2.79"x1.46")
Installation mode	Plane installation
Color	Black
Input plug	3-pin plug
Power Out Pin	Endspan 1.2 (+) ,3.6 (-) Midspan 4.5 (+) ,7.8 (-)
Output plug	18.5±0.5mm (Network Cable Connector)
Safety Standards	
Certification	CCC,CB,CE,FCC,UL

# PWR-DC5611

## Dimensions

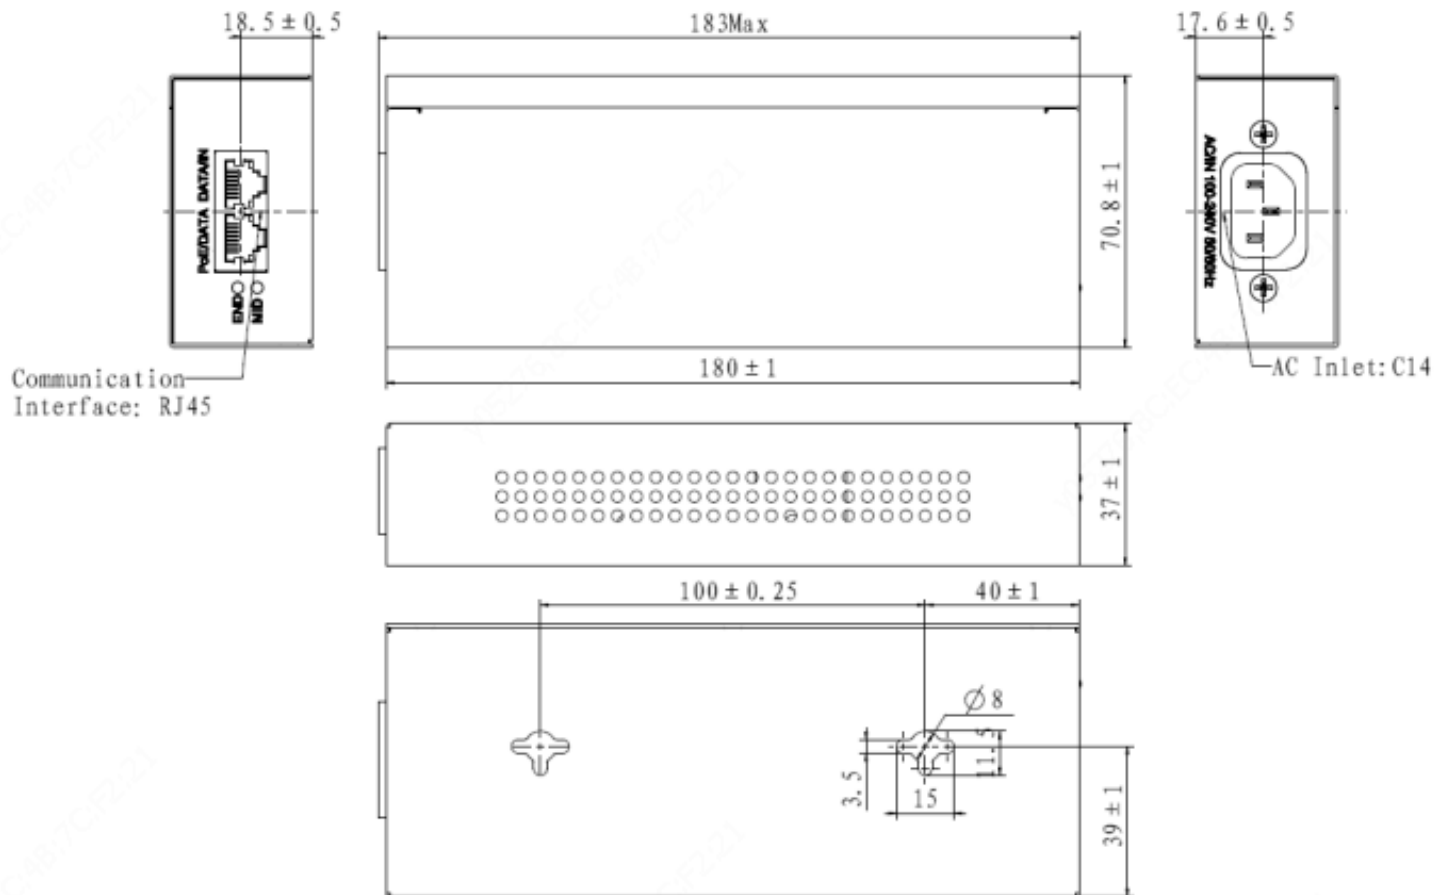

**Zhejiang Uniview Technologies Co.,Ltd.**

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com);[globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.