



IPC3234SR-DV

**4MP WDR Network IR Fixed
Dome Camera**



Features :


- 1/3" progressive scan CMOS
- Up to 2592 x 1520 resolution, 20fps
- 2.8~10 mm
- Smart IR, up to 30m IR distance
- 3D DNR, ROI, 9:16 corridor mode, ONVIF
- DC 12V, PoE, wide voltage range of $\pm 25\%$
- IP66, IK10

IPC3234SR-DV

4MP WDR Network IR Fixed Dome Camera

Camera	IPC3234SR-DV
Sensor	1/3", 4 megapixel, progressive scan CMOS
Day/Night	IR-cut filter with auto switch (ICR)
Shutter	Auto/Manual, 1/6~1/8000 s
Min. Illumination	Color: 0.03 lux (F1.6, 50IRE), black & white: 0.01 lux (F1.6, 50IRE)
S/N	>52dB
WDR	Optical WDR (up to 120dB)
Lens	2.8-12mm @F1.6 ; Angle of view: 105.0° (wide) ~30° (tele)
Zoom/Focus	Manual
IR Range	Up to 30m (98 ft) IR range
Video	
Max. Resolution	2592 × 1520
Video Compression	H.264, MJPEG
Frame Rate	4MP (2592×1520): max. 20 fps; 4MP (2560×1440): max. 25 fps; 3MP (2048×1520): max. 30 fps; 1080P (1920×1080): max. 30 fps
9:16 Corridor Mode	Supported
ROI(Region of Interest)	Supported
Video Streaming	Triple
Audio	
Audio Compression	G.711
Two-way Audio	Supported
Storage	
Edge Storage	Micro SD, up to 128 GB
Network	
Protocols	L2TP,IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,PPPoE,RTP,RTSP,Qos,NTP,FTP,HTTP,SNMP,SIP
Compatible Integration	ONVIF, IMOS, API
Interface	
Audio I/O	audio cable Input: impedance 35 kΩ; amplitude 2 V [p-p] Output: impedance 600 Ω; amplitude 2 V [p-p]
Alarm I/O	1/ 1
Network	1 RJ45 10M/100M Base-TX Ethernet
Video Output	1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
Reset	1 Reset Button
Power Output	DC 12V Power Output With PoE
General	
Power	12V DC, or PoE (IEEE802.3af) Max.6.6 W (PoE: max.7.2 W)
Dimensions (Ø × H)	Φ148 x 111.3 mm (Ø5.8" x 4.4")
Weight	0.75 kg (1.7 lb)
Working Environment	-40°C ~ 60°C (-40°F ~ 140°F), humidity ≤ 90% RH(non-condensing)
Vandal Resistant	IK10
Ingress Protection	IP66

*Product specifications and availability are subject to change without notice.

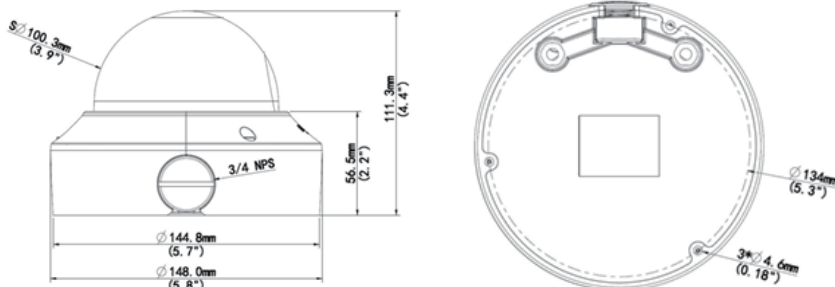

Zhejiang Uniview Technologies Co., Ltd.
Address: Building No.10, Wanlun Science Park, Jiangling Road 88, Hangzhou, P. R. China, 310051
Website: www.uniview.com Email: overseasbusiness@uniview.com

©2016 Zhejiang Uniview Technologies Co., Ltd. all rights reserved.
2016.01-OM-160125-OWN V1.0

