



Product Feature

- 1080p HD Solution
- Using all-imported industrial-grade LED screen, Designed for CCTV.
- High brightness, High contrast, High definition.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 178 ° wide viewing angle; Ensure that the image display is not deformed.
- 7/24 working Status; Continue working 5 years.
- Metal chassis design, Anti-static, Anti-magnetic field, Anti-interference, no radiation.
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Natural color



Contrast enhancement



Detail enhancement



1080p HD resolution

HD Quality

1920P/1080P



DISPLAY CHARACTERISTICS

Mode Name	LC-MS4301
Screen Size	43"
Active Display Area (mm)	941.184mm(W)×529.146mm(H)
Display Mode	16:9
LED Type	TFT-LED
Resolution	1820 × 1080
Display Color	1.073G
Pixel Pitch(mm)	0.490(H)×0.490(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	1200:1
Viewing Angle	89(H) /89(V)
Response Time	8ms
Backlight	LED

INPUT&OUTPUT

DVI	1
VGA	1
DP	1
HDMI 2.0	1
Speaker	2x3W(Stereo)

VIDEO


Color System	PAL/NTSC/SECAM
OSD Control	Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, phase, Color, Language..
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way




Power	AC100V~240V,50/60Hz
Working Temperature	-30 to +85 °C
Power Consumption	≅ 100W
Menu	Chinese/English(other languages supported)
Mounting	Stand mount, VESA mount
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

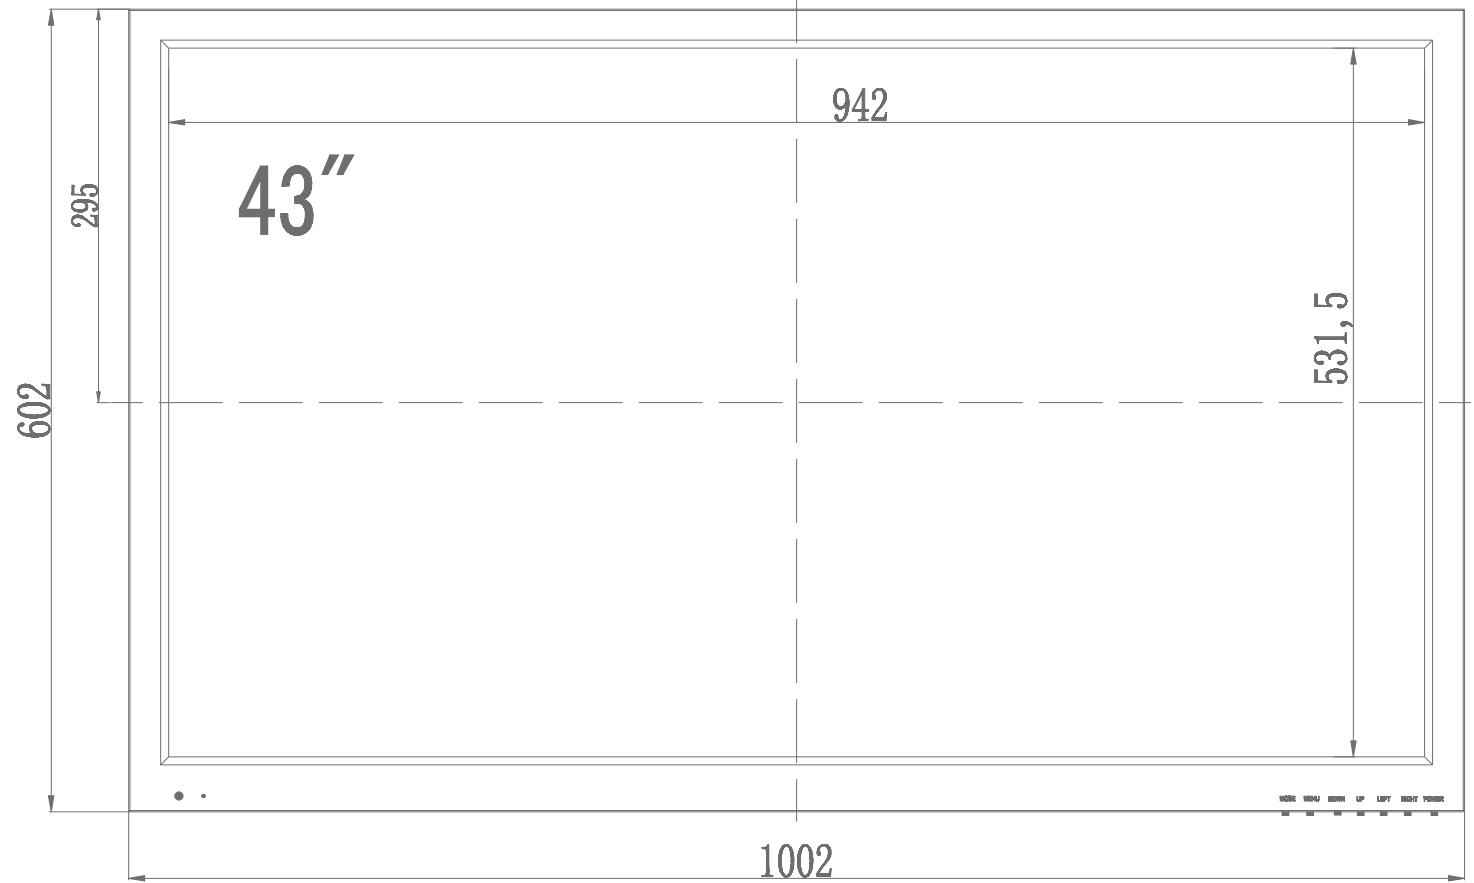

Unit:mm

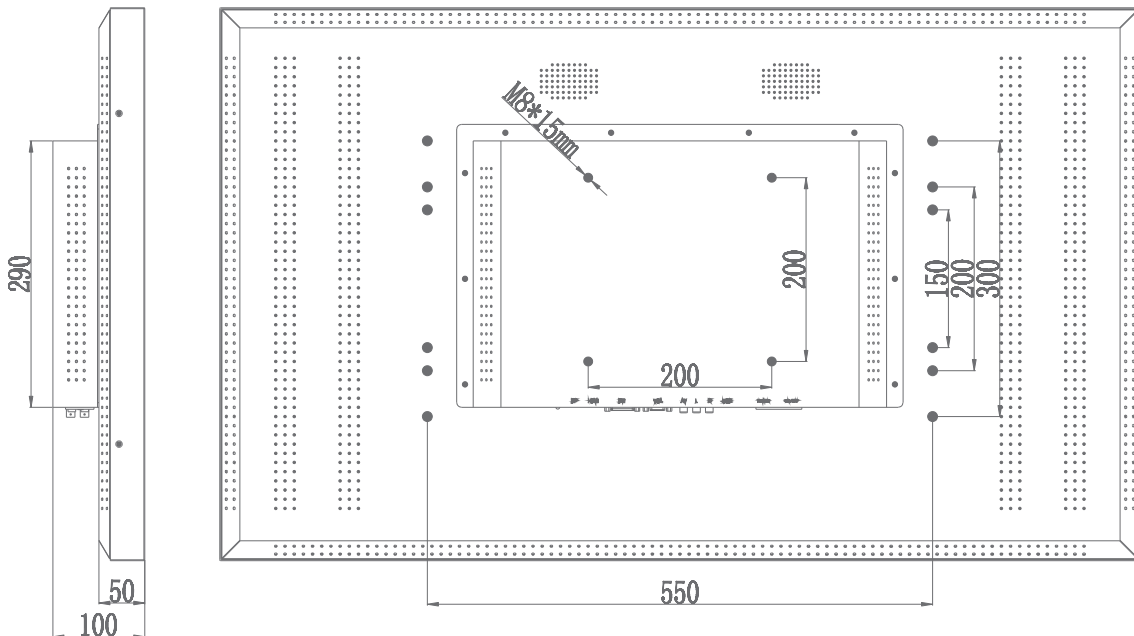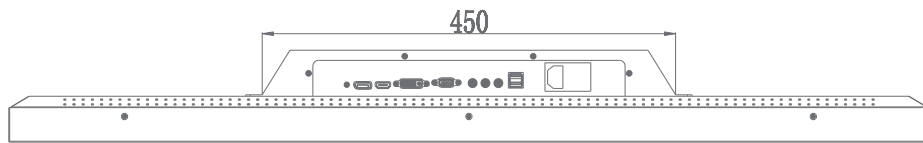

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© ANRECSON CORPORATION (). ALL RIGHTS RESERVED.